


CONN1

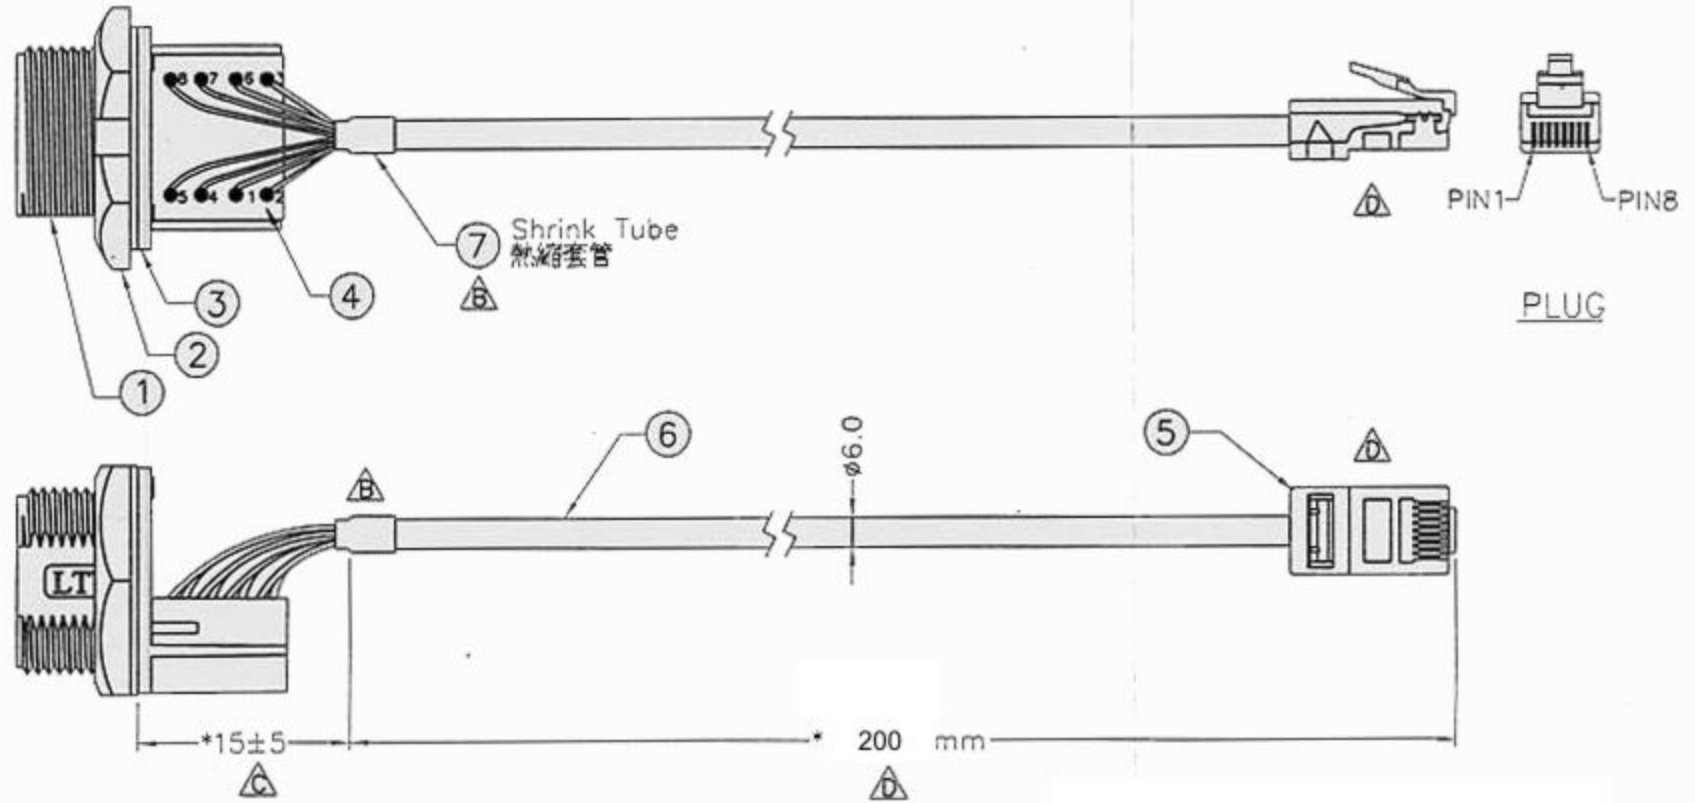

NOTE:
 1.* Important Dimension.
 (*為重點檢驗尺寸)


△ 2. 適用板厚 2.5mm 以下

8	Brown	棕	8	Twist 對線
7	White/Brown	白/棕	7	
6	Green	綠	6	Twist 對線
5	White/Blue	白/藍	5	
4	Blue	藍	4	Twist 對線
3	White/Green	白/綠	3	
2	Orange	桔	2	Twist 對線
1	White/Orange	白/桔	1	
Conn1	Wire Color		Conn2	
Pin Out				

△ 7	Shrink Tube	Black	Ø6.0*10mm	1	TUB060001XX
△ 6	Cable	Gray	Cat 5 UTP 4 x 4p ØD=5.3mm Gray PVC	1	WCA0373XX01
5	Plug		8P8C Unshielded Plug 6u"	1	CPLRJ04G006
△ 4	PCB		Cat 5e PCB	1	ZPB0026XXXX
3	Gasket	Black	EPDM	1	DGA0014EP70
2	Nut	Black	Nylon+GF	1	ANB138XXX01
1	Clip Socket	Black	PC+ABS,UL 94HB,UV	1	AAA216XXX01
NO	NAME	COLOR	SPECIFICATION	QTY	NOTE

UNIT : mm		TITLE	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5mm	LTWRJ45-IU21RX To 8P8C RJ45 Unshield		Yi Chuan Lee	2004/01/28
SCALE	Free	SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
REV.		DATE 2004/03/30	CUSTOMER	APPROVED BY	DATE
		SIZE A4			

REV.	REV. NO.	DATE	BY	DESCRIPTION
01				

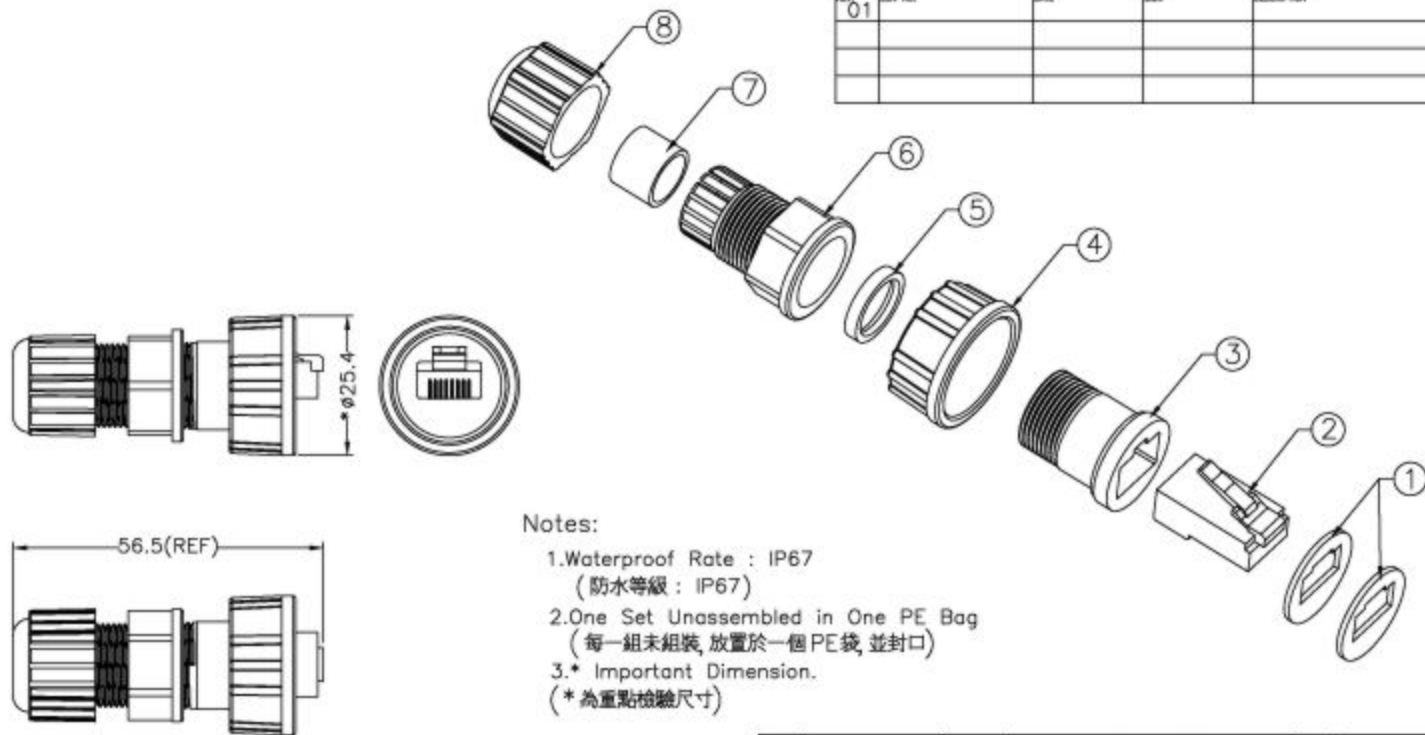

Notes:

1. Waterproof Rate : IP67
(防水等級 : IP67)
2. One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
3. * Important Dimension.
(* 為重點檢驗尺寸)

APPROVED
SIGNATURE _____
DATE _____

NO.	NAME	COLOR	SPECIFICATION	QTY	NOTE
9	PE Bag		90*85mm(Sealed)	1	HPE00900085
8	Sealing Nut	Black	Nylon	1	ANC179XXX01
7	Seals	Black	EPDM	1	DGA0036EP70
6	Clamp Ring	Black	Nylon	1	ANC178XXX01
5	Gasket	Black	EPDM	1	DGA0034EP70
4	Screw Nut	Black	Nylon+GF	1	ANB152XXX01
3	Body	Black	PC+ABS	1	ACA276XXX01
2	Plug		8P8C	1	CPLRJ04GD06
1	Gasket	Black	EPDM	2	DGA0068EP60

UNIT : mm		TITLE 8P8C Plug for Cable Assembly Type	REV. 01	DATE	SHEET 1 OF 1	SIZE A4	ITEM NO. IN-PL-4UXASXX	DRAWN BY	DATE 2004/11/02
			TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:1					CHECKED BY 龍向和
							CUSTOMER Ituner Networks(USA)	APPROVED BY 席武濤	DATE 2004/11/02